



# Pick Rack

## Assembly Instructions

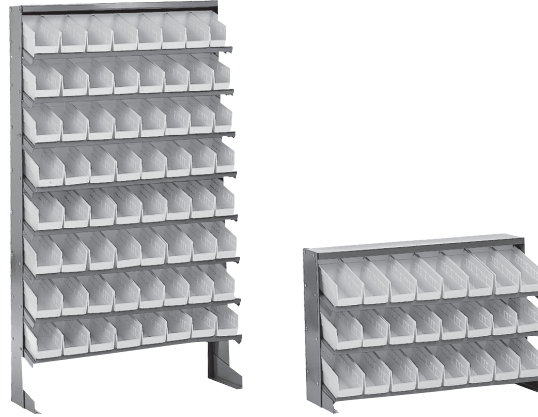

### PARTS LIST


#### Shelves

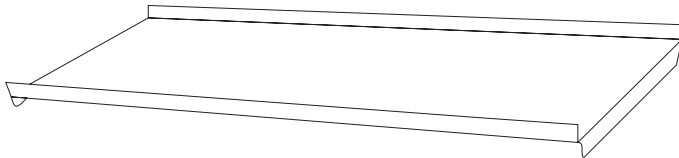

**3 Shelves for Bench  
 Rack**

**8 Shelves for Floor  
 Rack**


#### 2 Legs

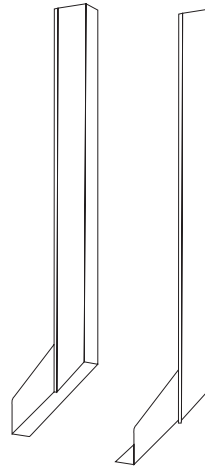

 **12 Screws & Nuts**  
 Bench Unit

 **32 Screws & Nuts**  
 Floor Unit


#### Shelf Brackets

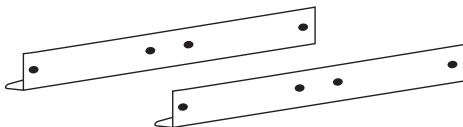

**6 Brackets for Bench  
 Rack**


**16 Brackets for Floor  
 Rack**

#### Top Plate



 **2 Screws & Nuts**

#### \*\* Rear Braces



 **4 Screws & Nuts**

\* Braces with Floor Rack Only



tel: 800.289.7225  
fax: 800.265.7225

[www.buyrack.com](http://www.buyrack.com)

## **GENERAL SAFETY INFORMATION**

**Use caution when setting up this unit.** Some parts may have sharp edges. Care must be taken when handling various pieces to avoid injury. For safety, wear a pair of work gloves when assembling or performing any maintenance.

### **STEP 1**

Begin assembly by determining the insides of the left and right rack legs. The inside of each leg can be determined with the folded-in steel at the bottom of the legs for which they stand on.

### **STEP 2**

Standing one of the legs up, put 2 screws through the lowest 2 holes located on the side of the leg at the same level. Then place 1 shelf bracket over the 2 screws using the end two pre-punched holes leaving the longer end of the bracket to the front of the leg.

### **STEP 3**

Mount a rack shelf onto the rack and bracket by inserting the shelf over the two screws and securing it with the nuts. Ensure the flat area of the shelf is facing up for proper installation.

### **STEP 4**

Repeat steps 2 and 3 to mount the remaining shelves onto the same leg (3 shelves for Bench Rack; 8 shelves for Floor Rack).

### **STEP 5**

Attach the top plate to the rack leg by aligning the rear screw hole of the top plate to the rear hole of the leg. Ensure the rack leg is positioned inside of the side lip of the top plate. Mount the plate with screw and nut into the aligned rear holes.

### **STEP 6**

Lay assembled half of the rack onto the units back.

### **STEP 7**

Insert the 2nd leg on the other side of the top plate with the leg positioned on the inside of the top plate lip. Try to align the top 2 holes of the leg with the top shelf holes. If holes do not line up easily, utilize a rubber mallet to set the holes into alignment. Mount the leg to the shelf with 2 screws and nuts.

### **STEP 8**

Secure the leg to the top plate with a screw and nut into the empty hole located on the back of the unit.

### **STEP 9**


Secure the remaining shelves to the leg. Use slight force to align each hole so that a screw and nut may be applied. **Do not over apply pressure so that harm may be done to you or the unit.**

### **\*\*STEP 10 - Floor Rack Unit**

Place unit onto it's front. Attach rear braces to the unit in an "X" fashion with 2 screws and nuts for each brace.

### **STEP 11**

Place the unit onto it's legs, check for stabilization, recheck all screws and nuts for tightness.

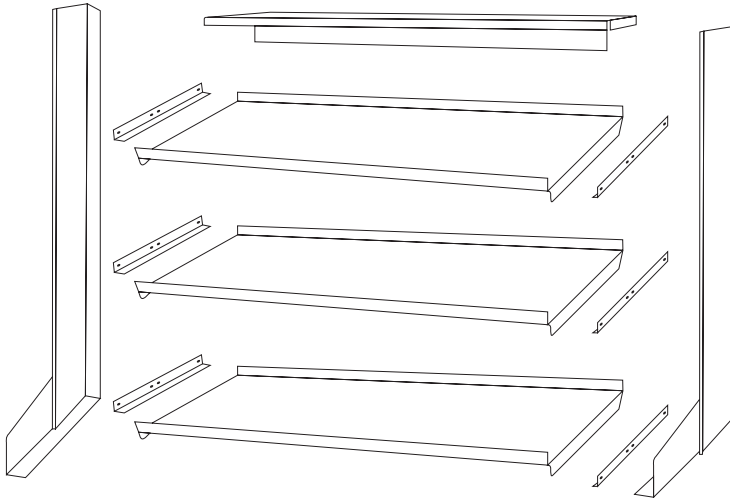

**Bench Rack**

**Floor Rack**

